

# Resin Guard™


Protective Rollcoat Flooring System



Resin Guard™ is a high-performance commercial floor finish specially designed to seal and protect warehouses, workshops and other high-traffic areas.

Available in all Australian Standard colours, the completely seamless resin flooring system can be applied in all conditions, and is resistant to wear, chemicals and impact.

Most importantly, Resin Guard™ has no strong smell and contains no solvents or flammables, so it can be installed safely without risk or disruption to your workers or business.

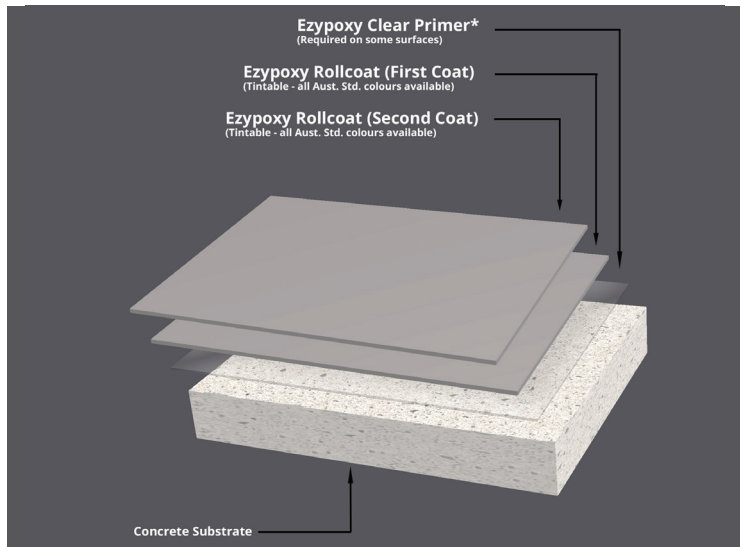

## Why you'll love Resin Guard™:

### ✓ SAFER

Resin Guard™ is completely solvent free. No strong smell, disruption or risk to your business!

### ✓ MORE DURABLE

Resin Guard™ is formulated using only the highest quality epoxy resins and functional fillers to maximise performance. No cheap solvents, diluents or fillers!

### ✓ LESS DOWNTIME

With no solvents, strong odours or flammables to contend with, and the ability to be applied in all conditions, Resin Guard™ is a great choice for minimising downtime.

### ✓ EASY TO CLEAN

The glossy, chemical-resistant surface handles spills from most commercial fluids and is easily maintained with normal cleaning equipment.

### ✓ EXTRA OPTIONS


Extra chemical resistance and impact resistance options are available. A specialist topcoat can be added to provide your choice of a matte or non-slip finish, as well as extra UV protection.



Ideal for:

✓ Warehouses ✓ Workshops ✓ Factories ✓ High Traffic Areas

## Installation - how it works

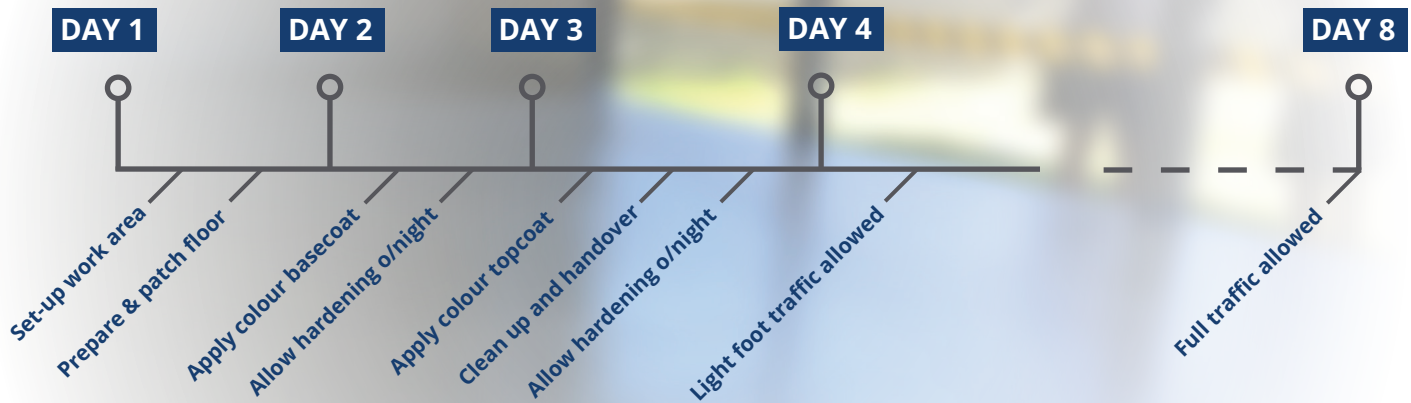

Note - The installation process shown is typical for the standard Resin Guard™ system on concrete floors less than 150m<sup>2</sup>. Removal of existing floors, surface damage/contamination, application of a primer coat, and/or larger areas will generally require more time.

## Getting ready for your new floor

- 1. Plan to be floorless** - a standard Resin Guard™ floor will take a few days and you'll need to stay off the floor the entire time. Keep protective measures in place for the duration and don't try to get back on it earlier than instructed.
- 2. Clear the floor** - remove all items from the floor before the starting date so the flooring technician can get straight to work. If there are heavy items that can't be moved, let them know beforehand.
- 3. Ensure easy access** - make sure the flooring technician can get in and out of the work area and has access to power. If there are any restrictions in this regard, once again it's a good idea to let them know beforehand.
- 4. Seal off** - footprints, bugs and dust don't go well with freshly laid floors. Close all windows, turn off lights and block doorways. If the floor is one part of a larger project, it's best to leave it to last to reduce the risk of other trades damaging it.
- 5. Make yourself available** - checking in with your flooring technician every now and again will make sure everyone stays on the same page and the project progresses as smoothly as possible.



# Resin Guard™ Colour Chart



**Neutral Grey (N23)**



**Light Grey (N35)**



**Pipeline Grey (N43)**




**Bridge Grey (N44)**



**Koala Grey (N45)**



**Black\***

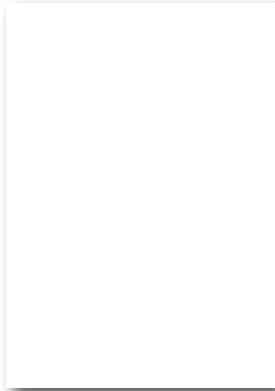

**White (N14)**



**Manilla (Y45)**




**Merino (Y56)**



**Mushroom (Y65)**



**Sunflower (Y15)**

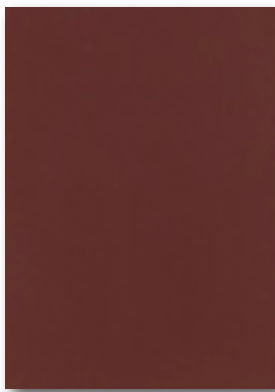


**Red Oxide (R63)**



**Signal Red (R13)**



**Shamrock (G23)**

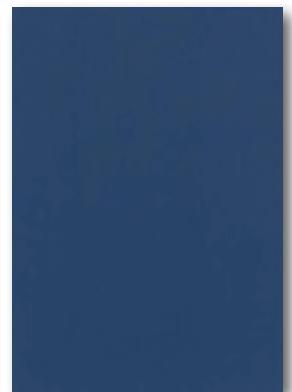

**Sapphire Blue (B14)**

\* Non-Australian Standard colour

- Colours shown on chart are indicative only. Actual colours may differ slightly.

- All Australian Standard colours available upon request. Contact Real World Epoxies for more information.